




Have Data Center HOTSPOTS?

Introducing Triad's New Fit-All 65% High Density Airflow Panel
Providing the Industry's Leading Data Center Hot Spot Solution

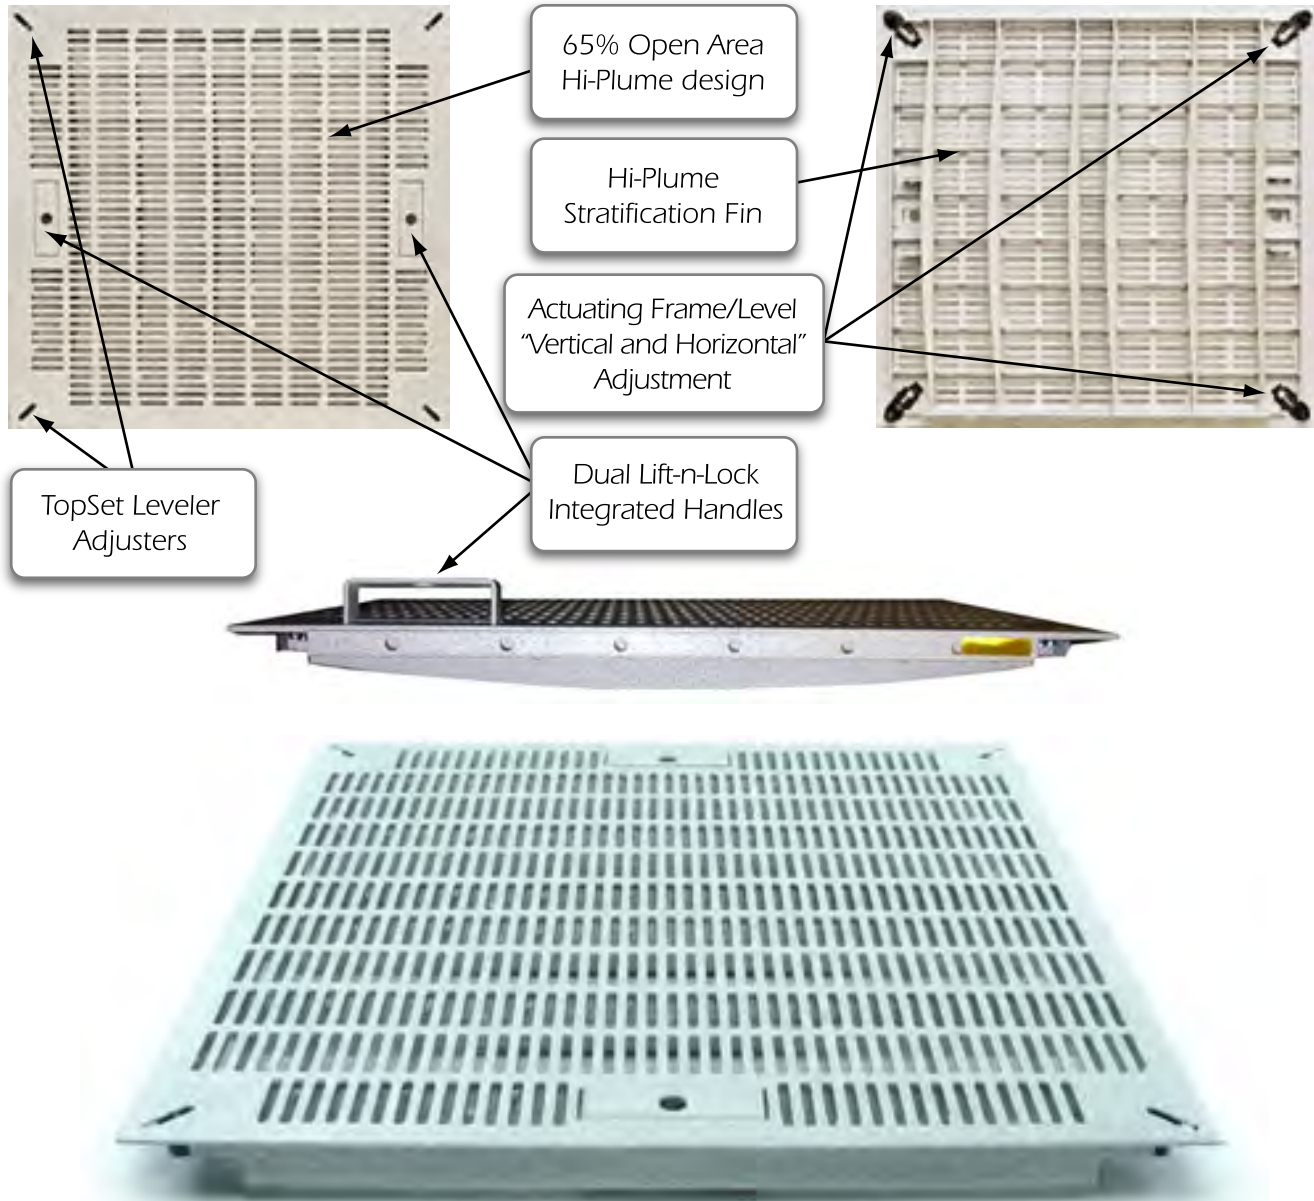

65% AIRFLOW

1 500-3000 LBS. LOAD RATING

FIT-ALL DESIGN FITS ALL FLOOR SYSTEMS






INDUSTRY LEADING DATA CENTER COOLING AND HOT SPOT SOLUTIONS



Triad's High Density Airflow Panel systems are the ideal solution for data center, server farm and hot spot cooling. Triad's patented & patent pending High Density Airflow Panel delivers 2-3 times more CFM than industry standard perforated airflow panels. This heavy duty steel airflow panel features between 1500 to 3000 lbs. load rating, a hardened textured finish, built in actuating frame levelers and integrated panel handles. Triad's Fit-All design will fit into most existing raised access floor systems providing the most flexible and low maintenance raised access floor system in the industry.

PANEL TYPE	MODEL	LOAD RATING	AVAILABLE FEATURES	COMPATIBILITY
65% Slotted Airflow 	Imperial 15TSS 30TSS	1500 lb/560 kg 3000 lb./1120 kg <small>*Using ADVP conversion</small>	Dual Handles Horizontal & vertical levelers Size: 24" x 24" 600 x 600 mm OPTIONS: Hi-Plume Stratification fin Row Damper OPD Damper PowderPlate finish (8 colors)	Available in both Imperial and Metric Sizes (Aluminum, Cement Fill, Hollow Steel, Woodcore) ALL STRINGER TYPES with width of 1.75" OR LESS.
	Metric 15TSM 30TSM			

OPTIONAL ACCESSORIES	DESCRIPTION	COMPATIBILITY
Individual Air Baffle 	Baffles are available in full row length or half length. Snap in & out.	Fits all 65%
Slide Damper 	Slide damper mounts the same as OPD and adjusts by use of screw driver from top surface. Like all slide dampers airflow restricted up to 50% even in full open position.	Fits all 65%
Opposed Blade Damper 	Opposed Blade Damper may be field or factory mounted by crimping tab into frame insert. Damper is adjusted from top surface by engaging screw driver into rotating adjuster and adjusting to desired setting. Opposed Blade damper restricts less than 10% airflow in full open position.	Fits all 65%


TRIAD STATIC DISSIPATIVE TEXTURED POWDERPLATE COATINGS



Beige Flek



Brown Flek



Crystal White



Grey Flek



Luna



Aggregate



Beige



Genesis

These color samples are representative only and will vary from the actual color depending on the computer monitor or printer used to view them. For accurate color, gloss and texture sample contact Triad. Conductive and chemical resistant coatings are available upon request.