

Sentry Smart CDU

Key Features

- > **High Density:** Single-power input feed; 24 outlets per enclosure (12 IEC C13 and 12 IEC C19 outlets)
- > **High Power Distribution:** Three phase 208-240V power options; 50 and 60 Amp power input feed
- > **Input Current Monitor:** Precisely measure the aggregate current draw (in amps) on each power circuit. On-site verification of the input current with the LED digital display. This units has six LEDs total; one for each of the six branches. Remote verification via web browser or serial screen.
- > **IP Access & Security:** Web interface, SSL, SSH, Telnet, SNMP, FTP, SNTp, Syslog, LDAP, LDAPS, RADIUS, TACACS and RS-232 access
- > **SNMP Traps & Alerts:** Provide automated SNMP-based alarms or Email alerts for power and environmental conditions
- > **Environmental Monitoring:** Each Smart CDU supports two external temperature & humidity probes and reports conditions thru the user interface without the need for additional IP addresses
- > **Add an Expansion Module:** Connect the Smart Expansion CDU (CL) to a Master unit (CS) for power monitoring of separate power circuits from a single IP address

CS-24VD/Y 60A with 12xC13 and 12xC19

High Density Power Distribution

The Smart Cabinet Distribution Units (CDU) provide reliable power distribution combined with local and remote power monitoring and environmental monitoring via IP. Use the network interface to view power, temperature and humidity levels via Web browser, or receive SNMP-based alarms and email alerts when conditions exceed defined thresholds.

The Smart CDU family has the capability to daisy chain units together. The Expansion CDU Module gives the ability to use one IP address across different power circuits.

Additional Benefits:



Branch Circuit Protection

The Sentry CDU Family meets the new UL 60950-1 requirement for branch circuit protection.

- UL 489 rated circuit breakers



Input Current Monitoring

The NEW Digital True RMS current monitoring, with improved accuracy, is critical to preventing overloads in high-density computing environments. There are six LED digital displays on the CDU enclosure which report the input current of each branch circuit for simple load balancing.



Temperature and Humidity

The Smart CDU supports two external 10' (3m) probes. Each of these probes measure both temperature and humidity. Receive SNMP-based alerts or email notifications when conditions exceed defined thresholds.



Linking for Smart CDU (Expansion Modules)

The Smart CDU family has the capability to daisy chain units together. The Expansion Module provides the ability to link two power circuits under one IP address.



Mixed Outlets

This Smart CDU combines both IEC 60320/C13 and IEC 60320/C19 outlets within a single CDU.



Model	Available Input Voltages	Amperage	Available Input Cord*	Outlets	Dimensions (L x W x D)
CS-24VDX454-006 CL-24VDX454-006*	240 V, 3-phase Delta, 50/60 Hz	60A	IEC 60309 60A Cordset, 10 ft (3m)	(12) IEC 60320/C13 (12) IEC 60320/C19	69.0 x 1.75 x 3.50 in. [1753 x 44 x 89 mm]
CS-24VDV454-006 CL-24VDV454-006*	240 V, 3-phase Delta, 50/60 Hz	50A	CS8365C, Cord Set, 10 ft (3m)	(12) IEC 60320/C13 (12) IEC 60320/C19	69.0 x 1.75 x 3.50 in. [1753 x 44 x 89 mm]
CS-24VYY454-006 CL-24VYY454-006*	208 V, 3-phase Wye, 50/60 Hz	60A	IEC 60309 60A Cord Set, 10 ft (3m)	(12) IEC 60320/C13 (12) IEC 60320/C19	69.0 x 1.75 x 3.50 in. [1753 x 44 x 89 mm]

* CL part numbers refer to the Expansion CDU

Additional Features and Specifications

Agency Approvals

- > US & Canada (cULus mark) to UL 60950-1:2003 and CAN/CSA 22.2 No. 60950-1-03
- > FCC Class A, Part 15
- > CE
- > EMC to EN 55022 Class A, EN 55024
- > CISPR 22 Class A

Communications and Security


- > 10/100 BaseT Ethernet
- > HTTP/HTTPS
- > SSLv3/TLSv1
- > SNMPv2
- > SSHv2
- > Telnet
- > LDAPS/LDAPv3
- > TACACS+
- > RADIUS
- > RS-232 (Serial)

Branch Circuit Protection

- > Compliant to UL 60950-1

Accessories

- > Optional Temperature & Humidity Probe
 - EMTH-1-1 Temperature & Humidity Probe, 10 ft (3m)
- > SPM (Sentry Power Manager) Appliance:
 - Monitor and Manage multiple Sentry CDU's
 - Monitor and Manage all alarm conditions
 - Reporting and Trending
 - Group or Cluster outlets for reboot and power information
- > Environmental Monitor
 - EMCU-1-1B allows up to (2) additional temperature & humidity probes, (1) water sensor, (4) dry contact closures, (1) analog-to-digital contact sensor. Includes (1) temperature/humidity probe with unit.

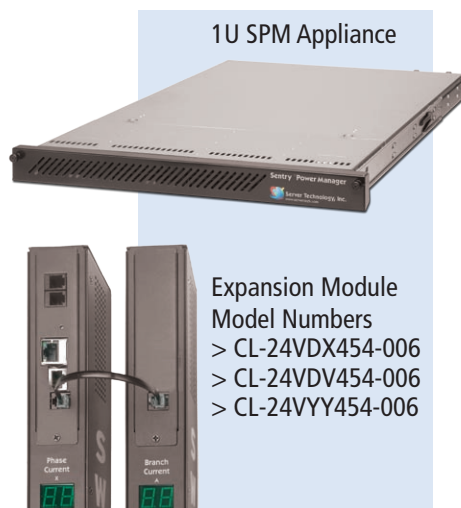

Server Technology

HEADQUARTERS - NORTH AMERICA
 Server Technology, Inc.
 1040 Sandhill Drive
 Reno, NV 89521
 United States
 1.775.284.2000 Tel
 1.775.284.2065 Fax
 sales@servertech.com
 www.servertech.com
 www.servertechblog.com

EMEA
 Server Technology Intl
 Sienna Court
 The Broadway
 Maidenhead
 Berkshire
 SL6 1NJ
 United Kingdom
 +44 (0) 1628 509053 Tel
 +44 (0) 1628 509100 Fax
 salesintl@servertech.com

APAC
 Server Technology Intl
 37th Floor, Singapore Land Tower
 50 Raffles Place
 Singapore 048623
 +65 (0) 6829 7008 Tel
 +65 (0) 6234 4574 Fax
 salesintl@servertech.com